

SMD0603-020

Performance Specification

Model	Mesking	V _{max}	I _{max}	I _{hold}	I _{trip}	P _d	Maximum Time To Trip		Resistance	
Model	Marking			@25°C	@25°C	Тур.	Current	Time	Ri _{min}	R1max
		(Vdc)	(A)	(A)	(A)	(W)	(A)	(Sec)	(Ω)	(Ω)
SMD0603-020	2	9.0	40	0.20	0.50	0.5	1.0	0.60	0.550	3.500
hold = Hold Current.	Maximum curre	ent device will n	ot trip in 25°C	still air.						
rip = Trip Current. M	inimum current	t at which the d	evice will alwa	ays trip in 25°C	still air.					
max = Maximum oper	ating voltage d	levice can with	stand without	damage at rate	d current (Imax	.).				
nax = Maximum faul	t current device	e can withstand	without dama	age at rated volt	tage (Vmax).					
d = Power dissipati	on when device	e is in the trippe	ed state in 25°	C still air enviro	onment at rated	voltage.				
timin/max = Minimum	Maximum devi	ice resistance	prior to tripping	g at 25°C.						
1 _{max} = Maximum dev	ice resistance i	is measured or	e hour post re	eflow.						
		alfinal matin and ma	ماد ما فاریم میں درم		المعربة متعامل	1 4				

CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.

Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202,Method 215	No change
Vibration	MIL-STD-202,Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Manufacture countered to an exections of the device in the trian of	atata ia 405 °C	

Maximum surface temperature of the device in the tripped state is 125 °C

AGENCY	APPROVALS :	
--------	-------------	--

Regulation/Standard:



2002/95/EC EN14582

UL pending

Ihold Versus Temperature


Model	Maximum ambient operating temperature (T $_{mao}$) vs. hold current (I $_{hold}$)								
Model	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
SMD0603-020	0.27	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07

SMD0603-020


Construction And Dimension (Unit:mm)

Model	4	A B		8			D	E
Model	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD0603-020	1.45	1.85	0.65	1.05	0.40	1.00	0.15	0.10

Dimensions & Marking








Termination Pad Characteristics

Terminal pad materials : Terminal pad solderability : Tin-plated Nickel-Copper Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

Thermal Derating Curve

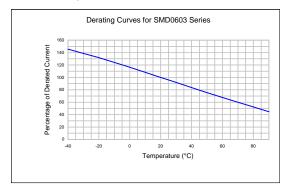

Typical Time-To-Trip At 25°C

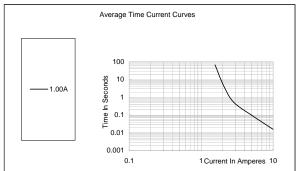


WARNING:

- · Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
 Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- · Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.

· Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability performance of our devices.

SMD0603-020

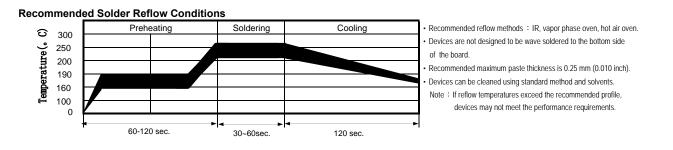

|←⊤

Embossed cavity

B₀


Tape And Reel Specifications (mm)

Paper Tape Component Dimensions

A₀

► D₀

Governing Specifications	
W	8.0 ± 0.2
P ₀	4.0 ± 0.10
P ₁ P ₂	4.0 ± 0.10
P ₂	2.0 ± 0.05
A ₀	1.05 ± 0.10
B ₀	1.85 ± 0.10
B ₀ D ₀ F E ₁	1.55 + 0.05
F	3.5 ± 0.05
E ₁	1.75 ± 0.10
E ₂ min.	6.25
Т	0.75
T₁max.	0.1
K ₀	0.75/0.95 ± 0.1
Leader min.	390
Trailer min.	160
Reel Dimensions	
A max.	178
N min.	60
W ₁	9.0 ± 0.5
W ₂	12.0 ± 0.05

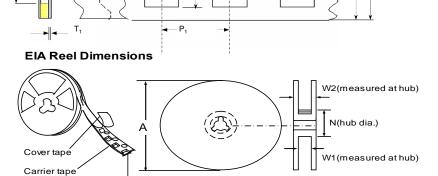

P

E₁

w

P₂

B

Storage And Handling

- Storage conditions : 40°C max, 70% R.H.
- · Devices may not meet specified performance
- if storage conditions are exceeded.

Order Information

Order Information	Packaging				
SMD0603	020	Tape & Reel Quantity			
Product name	Hold				
Size 1508 mm / 0603 inch	Current	5,000 pcs/reel			
SMD: surface mount device	0.20A				