



RF250 系列

元件尺寸 Product Dimensions (mm)

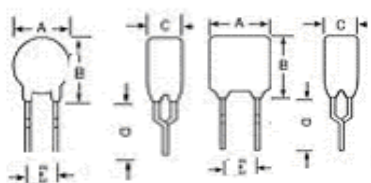

R1

R2



R3



型号 PART NO	A		B		C		D		E		图表 Fig
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
RF250-050	-	5.5	-	8.0	-	4.6	5.0	-	5.1	-	R1
RF250-080	-	5.8	-	9.9	-	4.6	5.0	-	5.1	-	R1
RF250-110	-	5.3	-	9.4	-	3.8	4.7	-	5.0	-	R2
RF250-120	-	6.5	-	11.0	-	4.6	5.0	-	5.1	-	R2
RF250-145	-	6.5	-	11.0	-	4.6	5.0	-	5.1	-	R2
RF250-180	-	10.4	-	12.6	-	3.8	5.0	-	5.1	-	R2
RF250-200	-	10.0	-	12.5	-	3.8	5.0	-	5.1	-	R2
RF250-400	-	10.2	-	13.0	-	3.8	5.0	-	5.1	-	R1
RF250-600	-	11.6	-	14.0	-	3.8	5.0	-	5.1	-	R1
RF250-800	-	14.0	-	18.5	-	3.8	5.0	-	5.1	-	R1
RF250-1000	-	20.1	-	22.6	-	3.0	5.0	-	10.2	-	R1
RF250-2000	-	22.5	-	29.0	-	3.0	5.0	-	10.2	-	R1
RF250-120C	5.5	-	5.5						2.0	2.3	R3

电气特性 Electrical Characteristics Determined at 25

PART NO	IH	IT	V _{max}	I _{max}	PD TYP	Maximum Time to Trip		Resistance (Ω)		
	(A)	(A)	(Vdc)	(A)	(W)	Current(A)	Time(Sec)	R _{min}	R _{max}	R _{1max}
RF250-050	0.05	0.10	250	3.0	1.0	0.25	3.00	28.0	33.0	43.
RF250-080	0.08	0.16	250	3.0	1.0	0.35	3.00	15.0	22.0	33.
RF250-110	0.11	0.22	250	3.0	1.0	1.0	0.75	5.0	9.0	16.
RF250-120	0.12	0.24	250	3.0	1.0	1.00	1.50	6.0	12.0	16.
RF250-145	0.145	0.29	250	3.0	1.0	1.00	2.50	5.0	10.0	20.
RF250-180	0.18	0.50	250	10.0	1.0	1.00	15.0	3.0	7.0	10.
RF250-200	0.2	0.58	250	10.0	1.0	1.00	20.0	3.0	6.0	9.0
RF250-400	0.4	1.10	250	10.0	1.0	2.00	30.0	1.0	3.0	5.0
RF250-600	0.6	1.20	250	10.0	1.0	3.00	31.0	0.6	2.0	3.5
RF250-800	0.8	1.60	250	10.0	1.0	4.00	35.0	0.4	1.0	2.0
RF250-1000	1.0	2.0	250	10.0	1.0	5.0	40.0	0.50	0.75	1.5
RF250-2000	2.0	4.0	250	10.0	1.0	5.0	45.0	0.10	0.40	0.080
RF250-120C	0.12	0.24	250	3.0	1.0	1.0	1.2	8.0	13.0	18.0

Thermal Derating Chart-I_H(A)

[illegible]