

## SMD1210-020

### Performance Specification

Model	Marking	$V_{max}$ (Vdc)	$I_{max}$ (A)	$I_{hold}$ @25°C (A)	$I_{trip}$ @25°C (A)	$P_d$ Typ. (W)	Maximum Time To Trip		Resistance	
							Current (A)	Time (Sec)	$R_{i_{min}}$ (Ω)	$R_{1_{max}}$ (Ω)
SMD1210-020	$\alpha C$	30	100	0.2	0.40	0.6	8	0.02	0.400	5.000

**$I_{hold}$**  = Hold Current. Maximum current device will not trip in 25°C still air.

**$I_{trip}$**  = Trip Current. Minimum current at which the device will always trip in 25°C still air.

**$V_{max}$**  = Maximum operating voltage device can withstand without damage at rated current ( $I_{max}$ ).

**$I_{max}$**  = Maximum fault current device can withstand without damage at rated voltage ( $V_{max}$ ).

**$P_d$**  = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

**$R_{i_{min}/max}$**  = Minimum/Maximum device resistance prior to tripping at 25°C.

**$R_{1_{max}}$**  = Maximum device resistance is measured one hour post reflow.

**CAUTION** : Operation beyond the specified ratings may result in damage and possible arcing and flame.

### Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		

AGENCY APPROVALS :

UL pending

Regulation/Standard:



2002/95/EC



EN14582

### $I_{hold}$ Versus Temperature


Model	Maximum ambient operating temperature ( $T_{mac}$ ) vs. hold current ( $I_{hold}$ )								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
SMD1210-020	0.29	0.26	0.22	0.20	0.16	0.14	0.13	0.11	0.08

# SMD1210-020

## Construction And Dimension (Unit:mm)


Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
SMD1210-020	3.00	3.43	2.35	2.80	0.30	0.80	0.30	0.10

### Dimensions & Marking

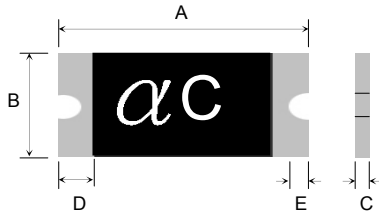

α = Trademark  
C = Part identification

### Recommended Pad Layout (mm)

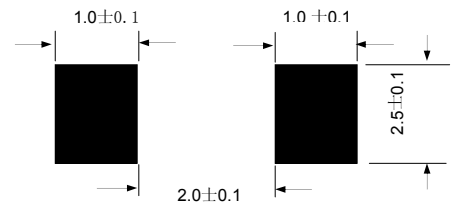


### Termination Pad Characteristics

Terminal pad materials : Tin-plated Nickel-Copper  
Terminal pad solderability : Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


### Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

### Thermal Derating Curve

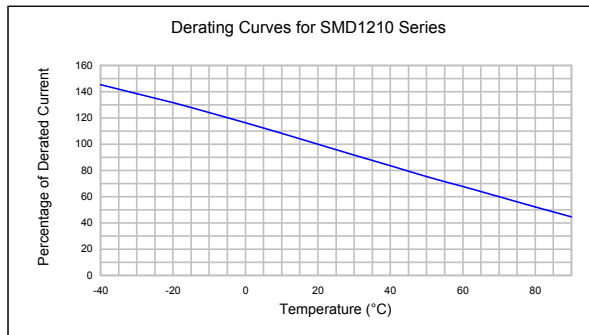

### Typical Time-To-Trip At 25°C

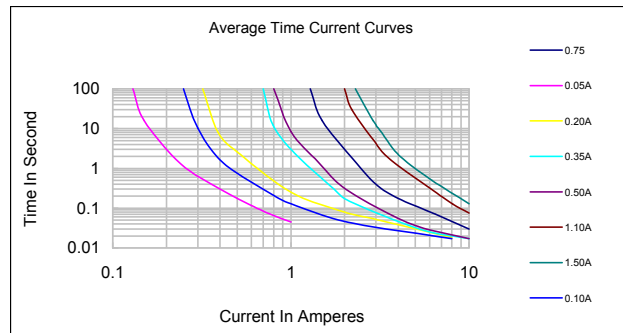


### WARNING:

- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability performance of our devices.

# SMD1210-020

## Recommended Solder Reflow Conditions

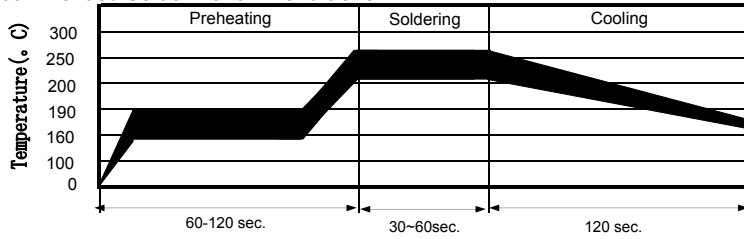


- Recommended reflow methods : IR, vapor phase oven, hot air oven.
  - Devices are not designed to be wave soldered to the bottom side of the board.
  - Recommended maximum paste thickness is 0.25 mm (0.010 inch).
  - Devices can be cleaned using standard method and solvents.
- Note : If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


## Tape And Reel Specifications (mm)

Governing Specifications	EIA 481-2
W	8.0 ± 0.20
P0	4.0 ± 0.10
P1	4.0 ± 0.10
P2	2.0 ± 0.10
A0	2.82 ± 0.10
B0	3.52 ± 0.10
B1max.	4.35
D0	1.5 + 0.1, -0.0
F	7.5 ± 0.05
E1	1.75 ± 0.10
E2min.	6.25
Tmax.	0.6
T1max.	0.1
K0	0.90 ± 0.1
Leader min.	390
Trailer min.	160
Reel Dimensions	
A max.	178
N min.	50
W1	8.4 + 1.5, -0.0
W2max.	22.4

## EIA Tape Component Dimensions

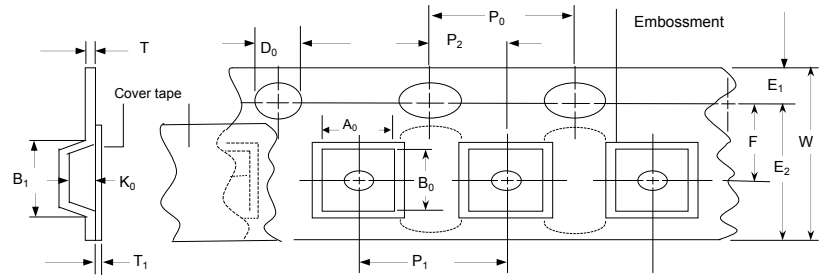

## EIA Reel Dimensions

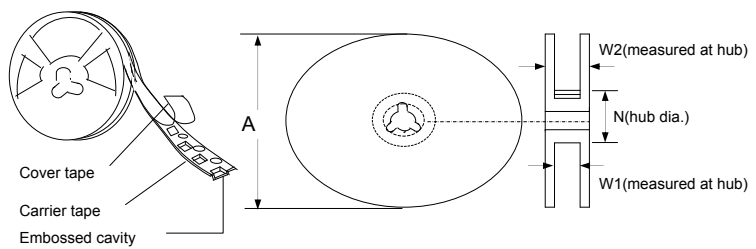

## Storage And Handling

- Storage conditions : 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

## Order Information

## Packaging

SMD1210	020	Tape & Reel Quantity
Product name	Hold	4,500 pcs/reel
Size 3225 mm / 1210 inch	Current	
SMD : surface mount device	0.20A	